



KAHLES

K864 ULTIMATE COMPETITIVE PERFORMANCE.



8-64x56

Designed to meet the highest standards of F-Class competition, the K864 provides unbeatable precision and an unequalled field of view. Offering championship-level clarity and control, it gives shooters the edge they need to perform at their best.

PRODUCT HIGHLIGHTS

- ◆ Unique ergonomics specifically designed for F-Class demands.
- ◆ True 8x zoom with uncompromised optical performance across the entire adjustment range.
- ◆ VISIONFLEX – Revolutionary optical design with a **64%** wider field of view* and a remarkably generous eyepiece.

FEATURES



Second focal plane



Non-illuminated reticle



36 mm
Main tube diameter 36 mm



MOA 1/8



Adjustment direction CCW



Top mounted parallax



Windage right



EASYREAD




REVOLUTION INDICATOR



ZEROSTOP




VISIONFLEX

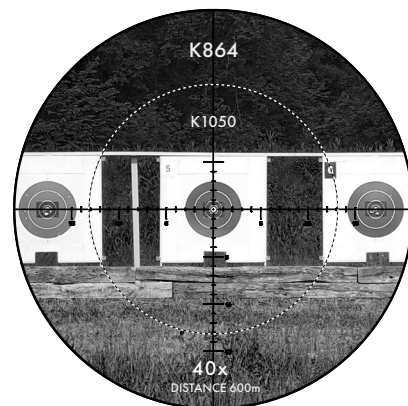

* Based on the comparison to K1050 at 40x.

RETICLES



MOAK+

SCAN TO EXPLORE
OUR PORTFOLIO.





K A H L E S

K864

TECHNICAL DATA

| | |
|--------------------------------|---|
| Focal plane | SFP |
| Magnification | 8-64 |
| Objective lens diameter (mm) | 56 |
| Field of view (m/100 m) | 6,1-0,8 |
| Exit pupil diameter (mm) | 7,1-0,9 |
| Eye relief (mm) | 92 |
| Diopter compensation (dpt) | +2 / -3 |
| Twilight factor (DIN 58388) | 21,2-59,9 |
| Parallax adjustment (m) | 8 - ∞ |
| Impact correction / Click E/W | 1/8 MOA |
| Clicks / Revolution E/W | 160/160 |
| Adjustment range E/W (m/100 m) | 1,6/1,16 (55/40 MOA) |
| Adjustment direction | CCW |
| Windage | right |
| Maintube diameter (mm) | 36 |
| Length (mm) | 17,4 |
| Weight (g) | 1045 |
| Battery type | - |
| Objective filter thread | M58 x 0,75 |
| Reticles | MOAK+ |
| VISIONFLEX | ✓ |
| EASYREAD | ✓ |
| ZEROSTOP | ✓ |
| Waterproof (ISO9022-8) | ✓ |
| Accessories (optional) | Flip-Up Cover Objective 56 mm / Ocular 52 mm, Sunshield 56 mm, Killflash ARD 56 mm, Parallax Spinner K-1, Throw Lever K-1, Bubble Level 36 mm |

SCAN FOR PRICES,
USER MANUAL &
SERVICE SECTION.

